

(12) **United States Patent**
Andry et al.

(10) **Patent No.:** **US 10,297,876 B2**
(45) **Date of Patent:** **May 21, 2019**

(54) **MICRO BATTERY DESIGN AND DIAGNOSIS**

H01M 6/04 (2013.01); *H01M 6/22* (2013.01);

(71) Applicant: **INTERNATIONAL BUSINESS MACHINES CORPORATION**,
Armonk, NY (US)

H01M 6/5005 (2013.01); *H01M 10/0585*
(2013.01); *H01M 10/484* (2013.01); *H01M*
2220/30 (2013.01)

(72) Inventors: **Paul S. Andry**, Yorktown Heights, NY
(US); **Qiang Huang**, Croton on
Hudson, NY (US); **Yu Luo**, Hopewell
Junction, NY (US); **Adinath S.**
Narasgond, Yonkers, NY (US)

(58) **Field of Classification Search**

CPC *H01M 10/48*
USPC 429/120
See application file for complete search history.

(73) Assignee: **INTERNATIONAL BUSINESS MACHINES CORPORATION**,
Armonk, NY (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,744,938 A * 4/1998 Rogers *G01R 31/006*
320/134
2009/0208834 A1* 8/2009 Ramasubramanian . *H01M 4/13*
429/149
2013/0280579 A1* 10/2013 Wright *H01B 1/122*
429/124

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 42 days.

(21) Appl. No.: **15/341,579**

OTHER PUBLICATIONS

(22) Filed: **Nov. 2, 2016**

List of IBM Patents or Patent Applications Treated as Related;
(Appendix P), filed Dec. 14, 2016; 2 pages.

(65) **Prior Publication Data**

US 2017/0176542 A1 Jun. 22, 2017

(Continued)

Related U.S. Application Data

Primary Examiner — James M Erwin

(62) Division of application No. 14/970,644, filed on Dec.
16, 2015, now Pat. No. 9,620,824.

(74) *Attorney, Agent, or Firm* — Cantor Colburn LLP; L.
Jeffrey Kelly

(51) **Int. Cl.**

H01M 10/48 (2006.01)
H01M 10/0585 (2010.01)
G01R 31/36 (2019.01)
H01M 4/24 (2006.01)
H01M 4/48 (2010.01)
H01M 6/04 (2006.01)
H01M 6/22 (2006.01)
H01M 6/50 (2006.01)


(57) **ABSTRACT**

Embodiments include methods and products for evaluating
microbatteries. The microbattery includes a cathode layer,
an anode layer physically separated from the cathode layer,
and an electrolyte layer in contact with the anode and the
cathode. The microbattery also includes at least one auxil-
iary electrode in physical contact with the electrolyte layer,
the auxiliary electrode containing at least one metal coating
and at least one non-conductive film, wherein the at least one
metal coating is physically separated from the cathode and
the anode.

(52) **U.S. Cl.**

CPC *H01M 10/48* (2013.01); *G01R 31/3627*
(2013.01); *G01R 31/3662* (2013.01); *H01M*
4/244 (2013.01); *H01M 4/48* (2013.01);

8 Claims, 9 Drawing Sheets

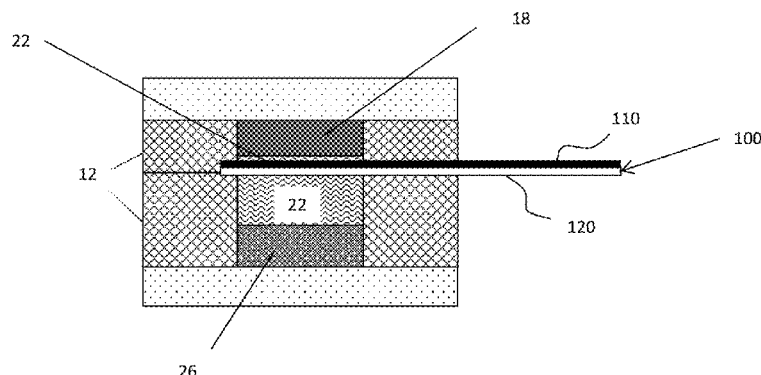

(56)

References Cited

OTHER PUBLICATIONS

U.S. Appl. No. 14/970,644, filed Dec. 16, 2015; Entitled: Micro Battery Design and Diagnosis.

List of IBM Patents or Patent Applications Treated as Related; (Appendix P), filed Jan. 24, 2017; 2 pages.

U.S. Appl. No. 15/402,613, filed Jan. 10, 2017; Entitled: Micro Battery Design and Diagnosis.

* cited by examiner

FIG. 1A

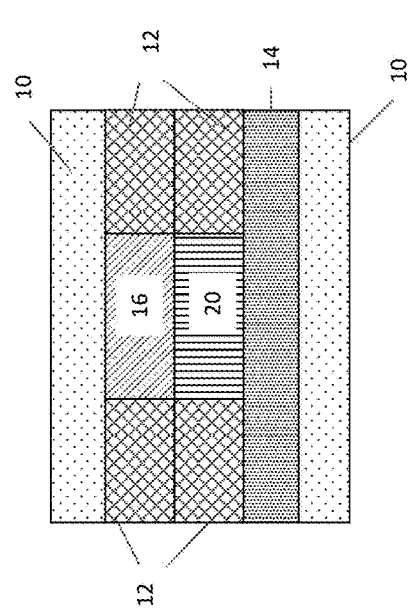


FIG. 1C

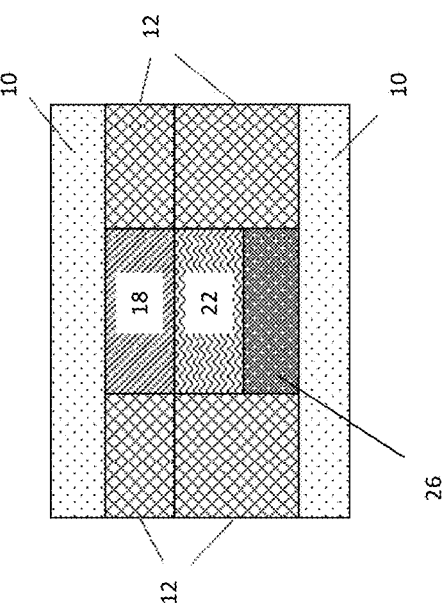


FIG. 1B

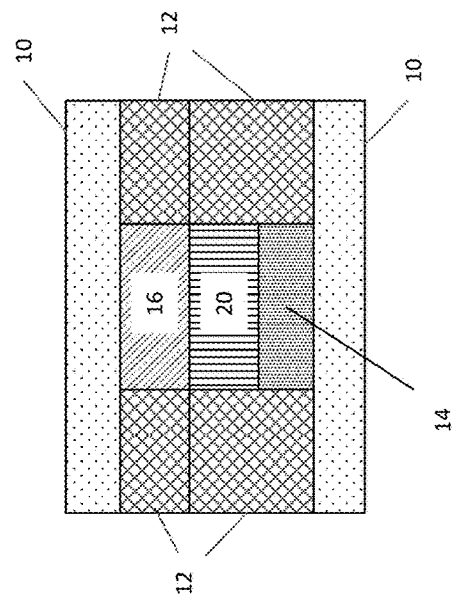


FIG. 2A

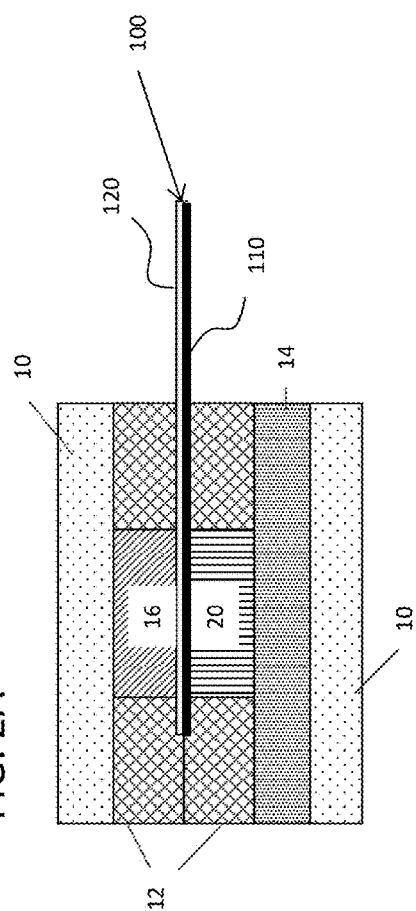
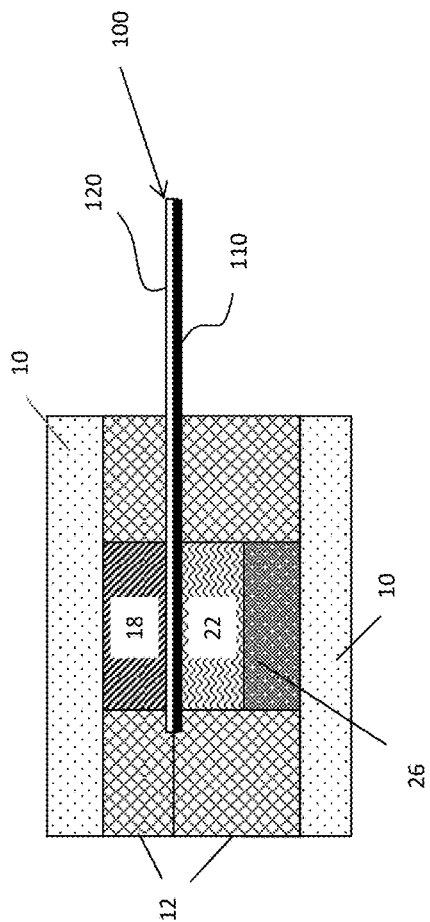


FIG. 2B



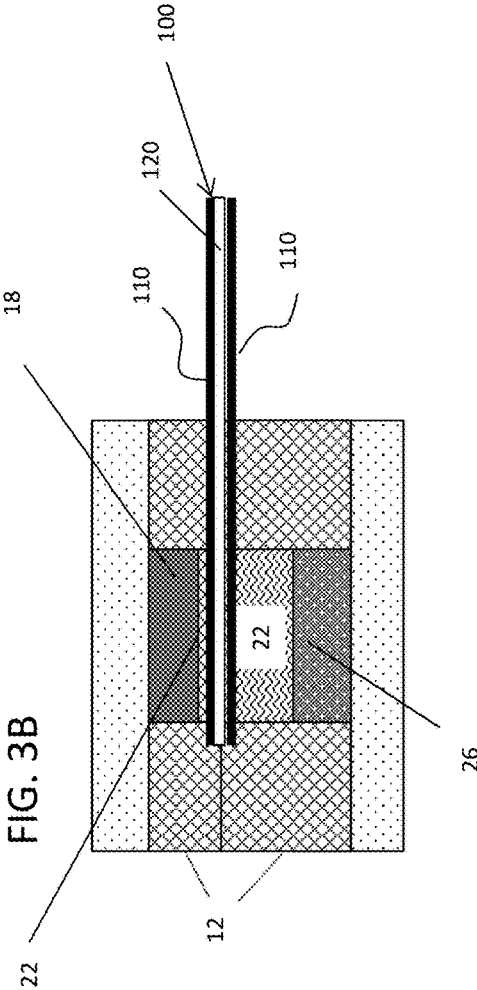
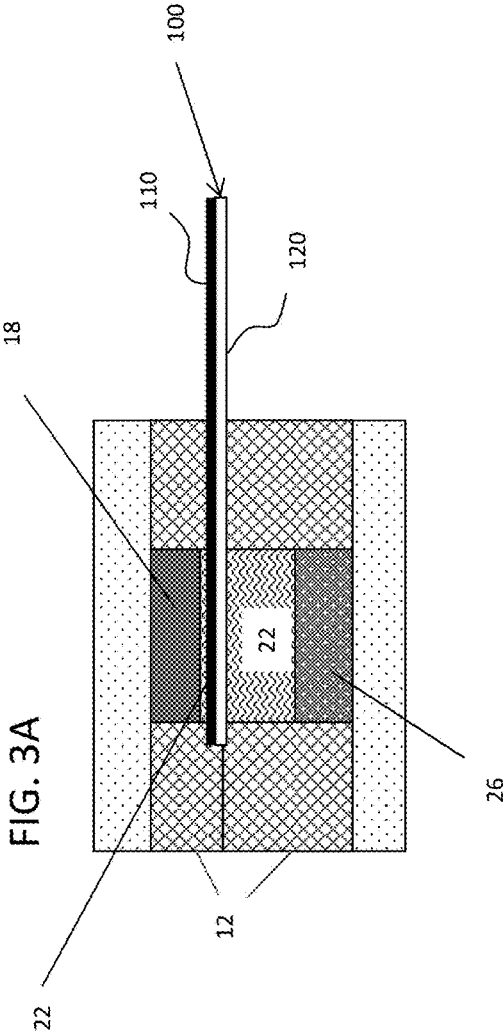


FIG. 4B

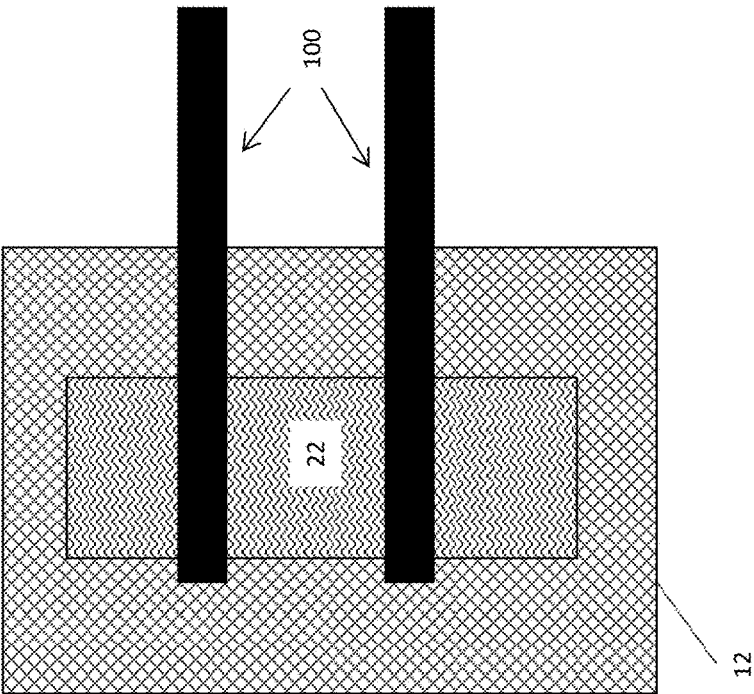
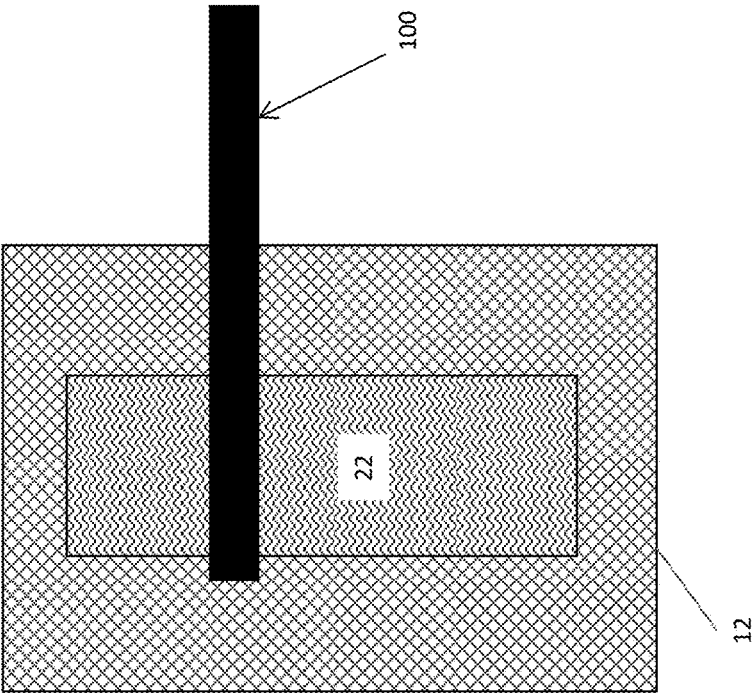


FIG. 4A



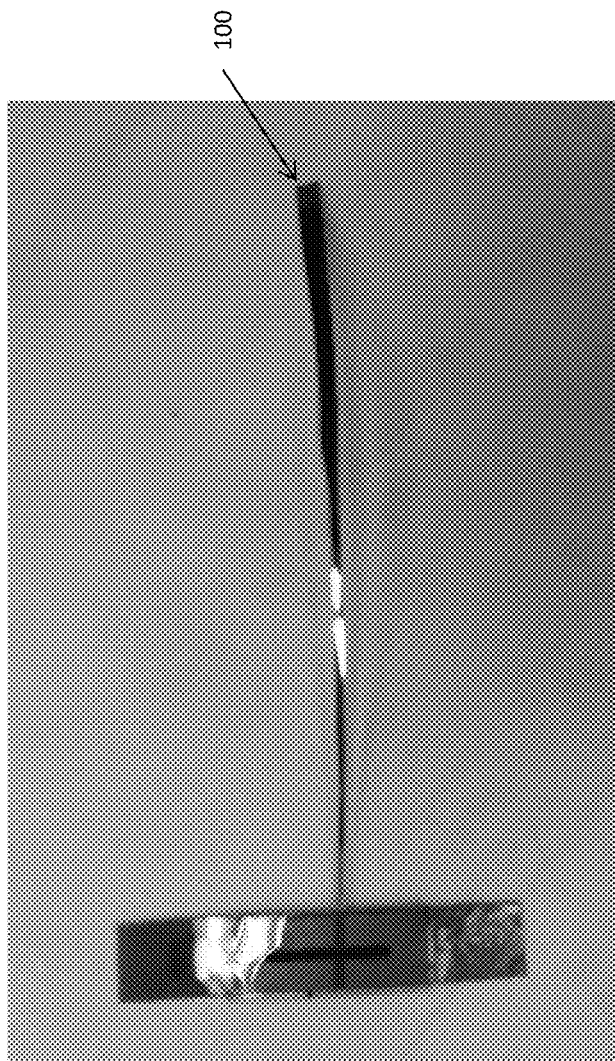


FIG. 5

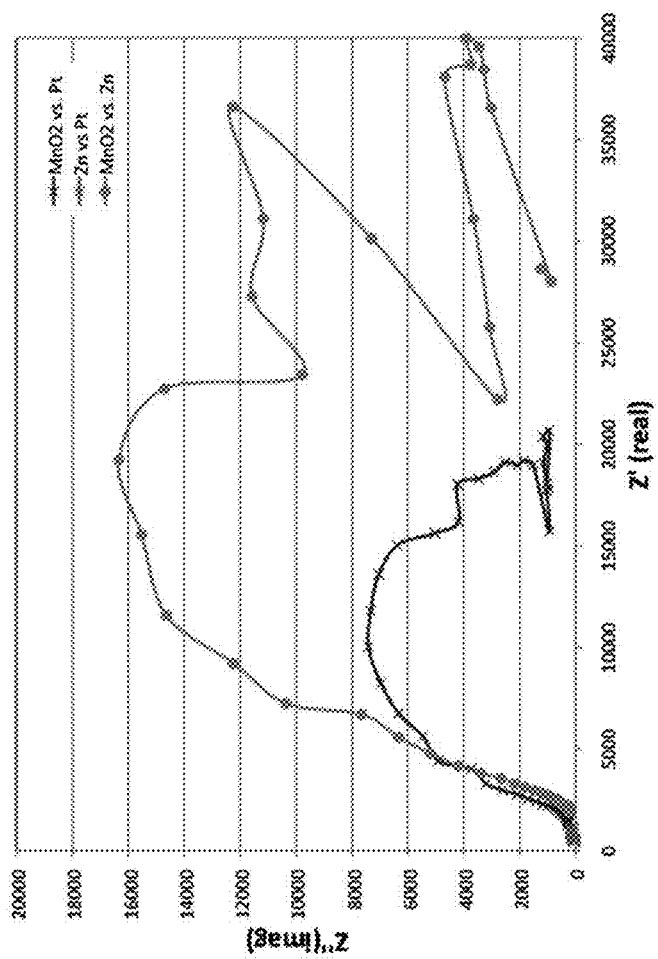


FIG. 6

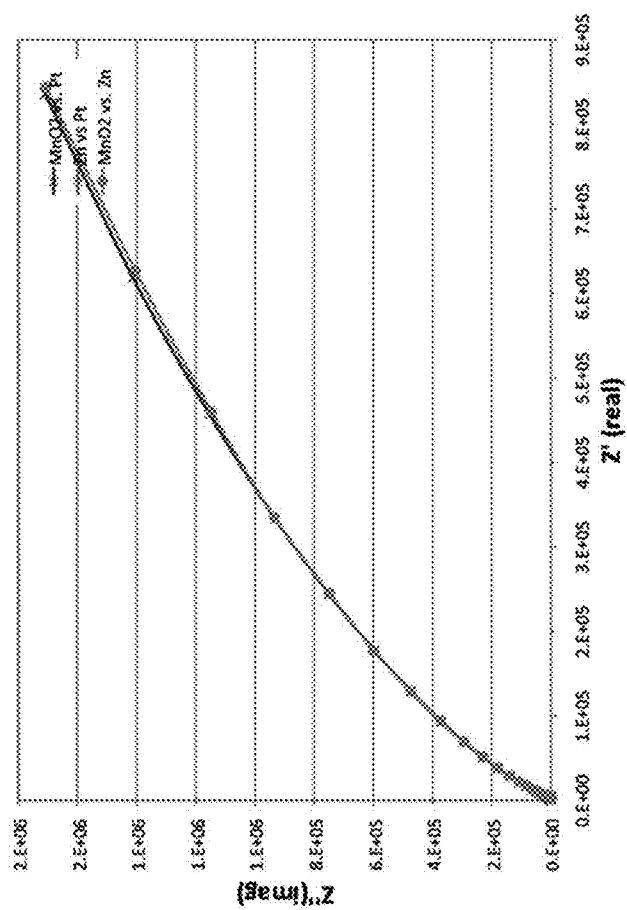


FIG. 7

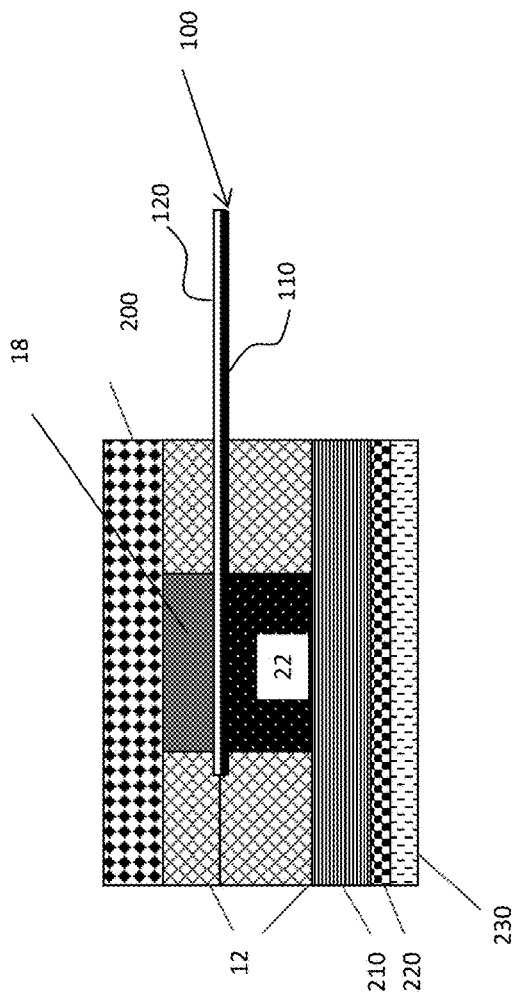


FIG. 8

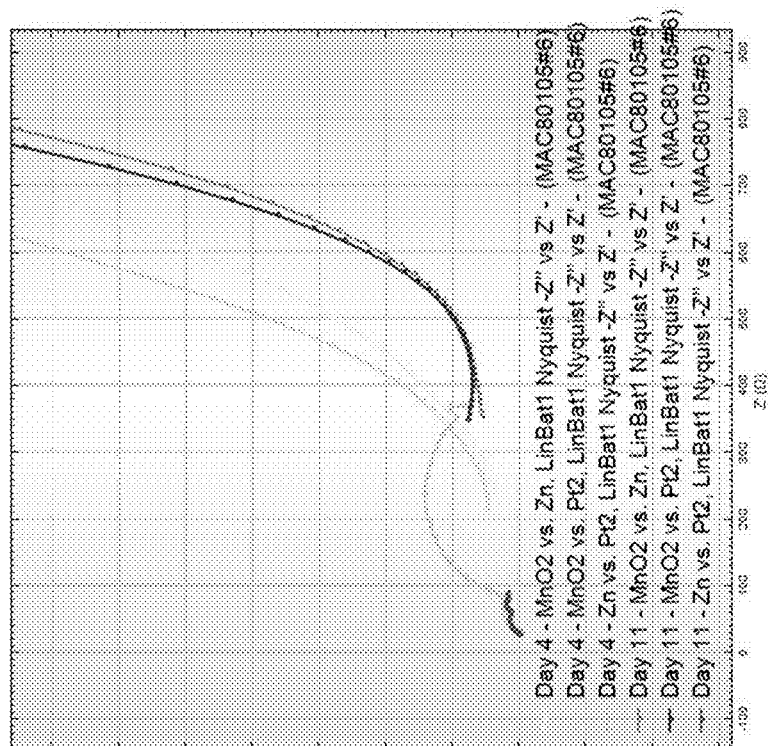


FIG. 9A

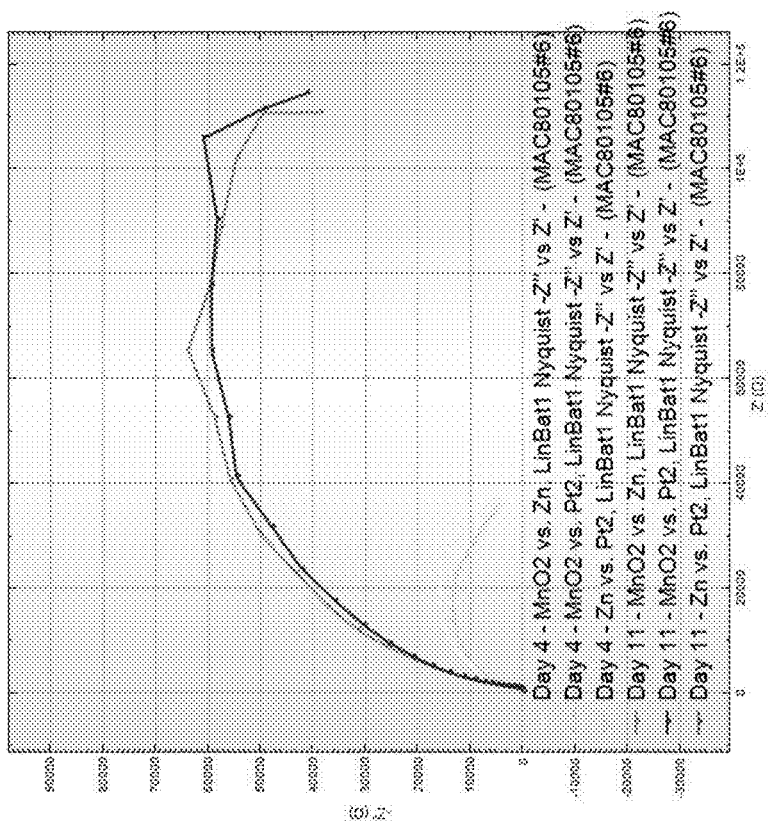


FIG. 9B

1

MICRO BATTERY DESIGN AND DIAGNOSIS**DOMESTIC PRIORITY**

This application is a Divisional of and claims priority to U.S. application Ser. No. 14/970,644 entitled "MICRO BATTERY DESIGN AND DIAGNOSIS," filed Dec. 16, 2015, which is incorporated herein by reference in its entirety.

BACKGROUND

The present disclosure relates to electrical energy sources, and particularly to micro batteries and micro battery diagnosis.

Conventional micro batteries can contain several components, including a cathode, an anode, and an electrolyte material. Such micro batteries can be used in a variety of applications. Industry demands ever smaller and more efficient energy sources, resulting in frequent testing and analysis of various component materials and battery designs. However, in a conventional battery, testing of individual component properties, such as impedance characteristics, can be difficult and in some cases only information concerning the fully assembled battery can be discerned, and not individual electrodes. It would be desirable to have the ability to test individual micro battery components to optimize battery materials and design.

SUMMARY

In accordance with an embodiment, a microbattery includes a cathode layer and an anode layer physically separated from the cathode layer. The microbattery also includes an electrolyte layer in physical contact with the anode layer and the cathode layer. The microbattery also includes at least one auxiliary electrode in physical contact with the electrolyte layer, the auxiliary electrode including at least one metal coating and at least one non-conductive film, wherein the at least one metal coating is physically separated from the cathode and the anode.

In accordance with another embodiment, a method of evaluating a micro battery, includes providing a micro battery containing a cathode layer and an anode layer physically separated from the cathode layer, and an electrolyte layer in contact with the anode and the cathode. The method also includes providing at least one auxiliary electrode in physical contact with the electrolyte layer, the auxiliary electrode comprising at least one metal coating and at least one non-conductive film, wherein the at least one metal coating is physically separated from the cathode and the anode. The method also includes forming a first electrical circuit between the auxiliary electrode and one of the cathode layer or the anode layer. The method also includes applying an external electrical potential to the first electrical circuit. The method also includes measuring one or more of a cathode layer property and an anode layer property.

In yet another embodiment, a method of evaluating a microbattery includes providing a micro battery. The microbattery includes a cathode layer, an anode layer physically separated from the cathode layer, an electrolyte layer in contact with the anode layer and the cathode layer, and a first auxiliary electrode and a second auxiliary electrode. Each of the first auxiliary electrode and the second auxiliary electrode are in physical contact with the electrolyte layer and each contains at least one metal coating and at least one non-conductive film. The at least one metal coating is

2

physically separated from the cathode and the anode. The method also includes forming a first electrical circuit between the first auxiliary electrode and the second auxiliary electrode. The method also includes applying an external electrical potential to the first electrical circuit. The method also includes measuring a property of the electrolyte layer.

BRIEF DESCRIPTION OF THE DRAWINGS

The subject matter which is regarded as the invention is particularly pointed out and distinctly claimed in the claims at the conclusion of the specification. The foregoing and other features and advantages of the invention are apparent from the following detailed description taken in conjunction with the accompanying drawings.

FIGS. 1A-1C depict cross sectional views of conventional micro-batteries, in which:

FIG. 1A depicts a cross sectional side view of an exemplary conventional micro-battery;

FIG. 1B depicts a cross sectional side view of another exemplary conventional micro-battery; and

FIG. 1C depicts a cross sectional side view of yet another exemplary conventional micro-battery.

FIG. 2A depicts a cross sectional side view of a micro-battery with an electrically isolated microelectrode in accordance with an exemplary embodiment.

FIG. 2B depicts a cross sectional side view of a micro-battery with an electrically isolated microelectrode in accordance with another exemplary embodiment.

FIG. 3A depicts a cross sectional side view of a micro-battery with an electrically isolated microelectrode having hydrogel adjacent to a top and bottom microelectrode surface in accordance with an exemplary embodiment.

FIG. 3B depicts a cross sectional side view of a micro-battery with an electrically isolated microelectrode having hydrogel adjacent to a top and bottom microelectrode surface in accordance with another exemplary embodiment.

FIG. 4A depicts a top down cross sectional view of a micro-battery with an electrically isolated microelectrode in accordance with an exemplary embodiment.

FIG. 4B depicts a top down cross sectional view of a micro-battery with two electrically isolated microelectrodes in accordance with another exemplary embodiment.

FIG. 5 is a photograph of an exemplary micro-battery in accordance with the disclosure.

FIG. 6 is a Nyquist plot of impedance analysis for an exemplary micro battery in accordance with the disclosure tested before discharging.

FIG. 7 is a Nyquist plot of impedance analysis for the same exemplary micro battery in FIG. 6 tested after being discharged for six hours.

FIG. 8 is another exemplary micro battery in accordance with the disclosure.

FIG. 9A is Nyquist plot of impedance analysis for an exemplary micro battery in accordance with the disclosure tested after being stored for four days and eleven days.

FIG. 9B is a rescaled Nyquist plot of impedance analysis for the exemplary micro battery in accordance with the disclosure in FIG. 9A.

DETAILED DESCRIPTION

In accordance with exemplary embodiments of the disclosure, a micro battery including an auxiliary electrode is provided. The micro battery of the disclosure can be subjected to an improved evaluation and analysis to measure separate properties and performance of the micro battery

cathode, anode, or electrolyte. In embodiments of the disclosure, battery performance or degradation of performance of a given design after manufacture, upon storage, or over operational time can be evaluated with reference to individual battery components by using an auxiliary electrode as a reference or working electrode in combination with a cathode, an anode, or another auxiliary electrode.

With reference now to the figures, FIGS. 1A-1C illustrate exemplary conventional micro batteries. As shown in FIG. 1A, an exemplary micro battery includes two current collectors **10**. In between the current collectors are a cathode layer **16**, an electrolyte layer **20**, and an anode layer **14**. As is shown, cathode layer **16** and anode layer **14** each have a side that is in physical contact with one of the current collectors **10** and another side that is in contact with the electrolyte layer **20**, which physically separates the cathode layer **16** from the anode layer **14**. The cathode layer **16** and electrolyte layer **20** can be physically isolated from components external to the micro battery with an insulating material **12**, such as polymer. The anode layer **14** can be a universal anode such that it extends beyond the insulating layer **12** adjacent the cathode layer **16** and electrolyte layer **20** and is thereby not isolated from components external to the micro battery.

In other exemplary micro batteries, for example as illustrated in FIG. 1B, the anode layer **14** can be adjacent to an insulating material **12** such that it is isolated from components external to the micro battery.

FIG. 1C illustrates an exemplary micro battery, in which two current collectors **10** are provided and, in between the current collectors **10**, are a cathode paste **18**, an electrolyte in hydrogel **22**, and a zinc anode **26**. The cathode paste **18**, electrolyte in hydrogel **22**, and zinc anode **26** are isolated from external components with insulating material **12**.

With reference to FIG. 2A, an embodiment of the disclosure includes a micro battery having two current collectors **10**, a cathode layer **16** in contact with the first current collector and an anode layer **14** in contact with the second current collector. An electrolyte layer **20** is positioned between the cathode layer **16** and anode layer **14**. In some embodiments, as shown, the micro battery can include insulating material isolating micro battery components from components and systems external to the micro battery. As shown in FIG. 2A, for example, insulating material **12** isolates the cathode layer **16** and electrolyte layer **20** from external components. As illustrated, an embodiment includes an auxiliary electrode **100**. The auxiliary electrode **100** includes a metal coating **110** and a non-conductive film **120**. The metal coating **110** contacts electrolyte layer **20** but is not in contact with cathode layer **16** or anode layer **14**. Thus, the auxiliary electrode **100** is electrically isolated from the anode layer **14** and cathode layer **16**, but is ionically connected to both layers. The auxiliary electrode **100** extends through the periphery of the micro battery to the exterior of the battery and is thereby accessible for application of a current, for example for battery testing and analysis.

The current collectors **10** can comprise conductive materials, including copper, nickel, gold, titanium, carbon, indium tin oxide, or any combination of such. In some embodiments, current collectors are conductive materials, including copper, nickel, gold, titanium, carbon, indium tin oxide, or any combination of such, coated on non-conductive materials, such as polymer.

The anode layer **14** and cathode layer **16** are electrodes and can be composed of any material useful as an electrode in a micro battery system. A cathode layer **16** can include,

for example, an oxide, such as iron oxide, cuprous oxide, cupric oxide, cobaltic oxide, manganese dioxide, lead dioxide, silver oxide, nickel dioxide, or silver dioxide, or it can include, for instance, ferrate, nickel oxyhydroxide, permanganate or bromate. In some embodiments, a cathode layer can include, for example, an amorphous vanadium-oxide, VOx, thin film. In some embodiments, the cathode layer includes manganese, such as manganese dioxide. In some embodiments, the cathode layer includes a cathode paste, such as Co₂O₃ paste, or a MnO₂ paste. In some embodiments the cathode paste contains conductive material at least partly of one or more allotropes of carbon, such as carbon powder, carbon graphite powder or carbon nanotubes.

The anode layer **14** can include, for instance, a metal, such as copper, nickel, lead, iron, chromium, aluminum, magnesium, or zinc. For example, in embodiments of the invention, micro batteries contain high-capacity anodes made from porous silicon. In some embodiments, the anode is zinc. In some embodiments, the anode **14** is oxidized at a potential lower than the potential at which the cathode is reduced.

Insulating material **12** can electrically separate micro battery components from external components. The insulating material **12** can also protect micro battery components from air. For example, insulating material can be a polymer coating resistant to acidic electrolytes, such as an adhesive tape or film including a polyimide, polyethylene, polypropylene, polyurethane, PET, or an epoxy resin coating.

In accordance with the disclosure, the non-conductive film **120** is a thin flexible polymer strip composed of an insulating material. The non-conductive film **120** acts as a substrate for at least one layer of metal coating **110**. For example, the non-conductive film can be a flexible polymeric material, such as a polymethylmethacrylate, polyamide, polycarbonate, polyethylene, polystyrene, polyvinyl chloride, polyethylene terephthalate, polyethylene naphthalate, polypropylene, or polyimide material. In some embodiments, the non-conductive film is a Kapton substrate.

In some embodiments, the metal coating **110** consists of at least one metal, such as silver, gold, copper, platinum, zinc, palladium, tungsten, molybdenum, zirconium, tantalum, or combinations thereof. In preferred embodiments the metal coating includes a noble metal. In some embodiments, the metal includes platinum or zinc.

In some embodiments, the non-conductive film is coated on one side with the metal coating. In some embodiments, the non-conductive film is coated on multiple sides with a metal coating. In embodiments in which the non-conductive film is coated on multiple sides with a metal coating, the coated sides can be coated with the same metal coatings or with different metal coatings.

In some embodiments, as shown in FIG. 2A, the metal coating **110** faces in the direction of the anode layer **14**. In such embodiments, an electrolyte layer can be optionally be positioned between the metal coating **110** and the cathode layer **16** or, in some embodiments, the auxiliary electrode **100** can be electrically isolated from the cathode layer **16** by the non-conductive film **120**.

As shown in FIG. 2B, in some embodiments, a micro battery includes two current collectors **10** and, in between the current collectors **10**, are a cathode paste **18**, an electrolyte in hydrogel **22** and a zinc anode **26**. Electrolyte in hydrogel can include, for example, an electrolyte solution of zinc chloride, ammonia chloride, potassium chloride, potassium hydroxide, and other salts and combination of salts. The hydrogel can be, for example, a silicon oxide gel, sodium silicate gel, and other materials. An auxiliary elec-

5

trode **100** is positioned in between the cathode paste **18** and the zinc anode **26**, such that the auxiliary electrode is electrically isolated from the cathode **18** and anode **26** but ionically connected to both of the cathode **18** and anode **26**. As is shown in FIG. 2B, auxiliary electrode includes a metal coating **110** in contact with the electrolyte in hydrogel **22**. A non-conductive film **120** of the auxiliary electrode **100** is adjacent the cathode paste **18**.

FIG. 3A depicts another embodiment of the disclosure, in which an auxiliary electrode **100** includes a metal coating **110** and a non-conductive film **120**, in which the metal coating **110** and the non-conductive film **120** are in contact with electrolyte in hydrogel **22**. The auxiliary electrode **100** is electrically isolated from the anode layer **14** and the cathode layer **16**, but is ionically connected to both layers. In some embodiments, as shown, the metal coating **110** faces in the direction of the cathode layer **16**. In such embodiments, as illustrated, an electrolyte layer is positioned between the metal coating **110** and the cathode layer **16**.

In some embodiments, as shown for example in FIG. 3B, an auxiliary electrode **100** contains more than one metal coating **110**. For example, an auxiliary electrode **100** can have a metal coating **110** on a side of the auxiliary electrode **100** facing a cathode paste **18** and a second metal coating **110** on a side of the auxiliary electrode facing a zinc anode **26**. A non-conductive layer **120** is positioned between the two metal coatings **110**. Each metal coating **110** is electrically isolated from the cathode paste **18** and the zinc anode **26** but is ionically connected to both through electrolyte in hydrogel **22**.

FIG. 4A depicts a top down cross sectional view of an exemplary micro battery depicted in FIG. 3A, taken through the electrolyte in hydrogel **22**. As is shown, an auxiliary electrode **100** contacts the electrolyte in hydrogel **22** and passes through insulating material **12** such that it is accessible outside of the micro battery.

FIG. 4B depicts a top down cross sectional view of an exemplary micro battery according to another embodiment, taken through electrolyte in hydrogel **22**. As is shown, multiple auxiliary electrodes **100** contact the electrolyte in hydrogel **22** and passes through insulating material **12** such that they are accessible outside of the micro battery. In some embodiments, a micro battery includes two auxiliary electrodes **100**. In some embodiments, a micro battery includes more than two auxiliary electrodes, such as three or four auxiliary electrodes.

FIG. 5 is a photograph of an exemplary zinc (Zn)—manganese oxide (MnO₂) micro battery with a platinum coated auxiliary electrode **100** in accordance with the disclosure. As is shown, auxiliary electrode **100** extends outside of the micro battery and is accessible, for example, for impedance spectroscopy.

In accordance with the disclosure, a method of testing a micro battery includes providing a micro battery with one or more auxiliary electrodes as disclosed herein. An electrical circuit between the auxiliary electrode and either the cathode or the anode can be formed and an external electrical potential can be applied to the auxiliary electrode-anode or auxiliary electrode-cathode circuit. The use of the auxiliary electrode as a reference can allow deconvolution of anode and cathode performance in testing and analysis of micro batteries.

For example, an electrical circuit between the anode and cathode can be formed and evaluated in a first test using standard techniques known to persons skilled in the art, such as Impedance Spectroscopy. Thereafter, an electrical circuit between the anode and auxiliary electrode can be formed

6

and evaluated in a second test using the same standard techniques. Thereafter, an electrical circuit between the cathode and the auxiliary circuit can be formed and evaluated using a third test using the same standard techniques. Thereafter, comparison of the first, second, and third test results can reveal results that are attributable to one or the other of the cathode or the anode. In some embodiments, circuit resistance can be measured and compared. In some embodiments, charge transfer resistance can be measured and compared. In some embodiments, open circuit potential can be measured and compared.

Impedance spectroscopy using the auxiliary electrode as a reference electrode can be used to separately evaluate the battery anode and the battery cathode. Impedance spectroscopy using two auxiliary electrodes as a working electrode and a reference electrode can be used to evaluate the electrolyte.

In some embodiments, the auxiliary electrodes can be removed after battery evaluation. For example, in some embodiments, portions of the auxiliary electrodes can be cut from the device. In some embodiments, the auxiliary electrodes can be pulled from the device.

In some embodiments, a micro battery contains two auxiliary electrodes in contact with an electrolyte layer. In such embodiments, one auxiliary electrode can be used as a reference electrode and one as a working electrode to evaluate the electrolyte layer. A counter electrode can include a battery anode, battery cathode, or another auxiliary electrode. Measuring impedance at high frequency can indicate a series resistance between working and reference electrodes, which largely reflects the resistance of the electrolyte. Comparing the series resistance along the discharge of the battery, or of an aging battery, can indicate the electrolyte conductivity or concentration change, thereby providing diagnostic information.

In some embodiments, impedance is measured as a function of discharge time. In some embodiments, impedance is measured as a function of storage time.

An exemplary micro battery for use in an impedance test is depicted in FIG. 8. The micro battery includes a titanium current collector **200** in physical contact with a cathode paste **18**. Cathode paste **18** is adjacent to an electrolyte in hydrogel **22**. An auxiliary electrode **100** is positioned between the cathode paste **18** and the electrolyte hydrogel **22** such that a metal coating **110**, such as platinum coating, is in physical contact with the electrolyte but electrically isolated from the cathode paste by way of the non-conducting strip **120**, such as a Kapton strip. The electrolyte hydrogel is adjacent to a zinc anode **210**, which rests atop a nickel/titanium layer **220**, which in turn rests atop a Kapton layer **230**. In an impedance test, the platinum of the auxiliary electrode **100** can be used as a reference electrode.

The dimensions of the micro battery can vary based upon the desired application. For example, in some embodiments, the micro battery has a length of 0.1 mm to 10 mm, such as from 0.5 mm to 10 mm, or from 0.5 mm to 5 mm. In some embodiments, the micro battery has a width of 0.1 mm to 10 mm, such as 0.5 mm to 10 mm, or from 0.5 mm to 5 mm. The micro battery can have a thickness of 0.1 mm to 1 mm, for example 0.1 mm to 0.8 mm, or 0.1 mm to 0.5 mm. In some embodiments, the micro battery has a trench width of 0.5 mm to 200 mm and a length of 5 mm to 300 mm.

Example 1

A micro battery with a platinum auxiliary electrode in accordance with the disclosure was evaluated using imped-

7

ance spectroscopy. The micro battery included a MnO_2 cathode paste and a Zn anode. Using the platinum auxiliary electrode as a reference, Open Circuit Potential (O.C.P./V) and circuit resistance were measured in a fresh battery. Results are depicted in Table 1 below. A Nyquist plot of the impedance spectroscopy is depicted in FIG. 6, wherein R_s is the resistance in series and R_c is the charge transfer resistance of the circuit.

TABLE 1

Electrodes tested	O.C.P. (Volts)	R_s /(Ohms)	R_c /(Ohms)
MnO_2 vs. Zn	1.69	2041	30000
MnO_2 vs. Pt	1.17	1431	17000
Zn vs. Pt	-0.52	469	740

As is shown in Table 1, the Open Circuit Potential is measurable not only for the overall micro battery, but also is measurable through the auxiliary electrode, separately for the anode and for the cathode. Similarly, Impedance Spectroscopy reveals an overall micro battery series resistance of 2041 ohm and charge transfer resistance of about 30000 ohm when testing is conducted using the cathode and anode. Using the auxiliary electrode instead of either the cathode or the anode allows separate analysis of the cathode and anode. As is shown in Table 1, the cathode was evaluated against the auxiliary electrode and revealed a cathode series resistance of 1431 ohm and a cathode charge transfer resistance of 17000 ohm. Anode evaluated against the auxiliary electrode revealed an anode series resistance of 469 ohm and anode charge transfer resistance of 740 ohm. Thus, in this example, the main series resistance and main charge transfer resistance were determined to originate from the MnO_2 cathode.

Example 2

The same micro battery described in EXAMPLE 1 was measured after a six hour discharge in a similar manner. Results are depicted in Table 2 below. A Nyquist plot of the impedance spectroscopy is depicted in FIG. 7.

TABLE 2

Electrodes tested	O.C.P. (Volts)	R_s /(Ohms)	R_c /(Ohms)
MnO_2 vs. Zn	1.18	3100	greater than 8.0E+5
MnO_2 vs. Pt	0.70	2700	greater than 8.0E+5
Zn vs. Pt	-0.48	360	240

As is shown in Table 2, the auxiliary electrode allows separate evaluation of the anode and for the cathode. Impedance Spectroscopy reveals that degradation of the micro battery, or the increase in charge transfer resistance, after six hour discharge is attributable to the MnO_2 cathode.

Example 3

A micro battery as depicted in FIG. 8, containing a MnO_2 cathode and a Zn anode was subjected to impedance testing after manufacture and over the course of storage at day four and day eleven. Nyquist plots of the impedance spectroscopy of the battery after being stored for four and eleven days are depicted in FIGS. 9A and 9B. Results are summa-

8

rized in Table 3 below, wherein R_s is the resistance in series, R_c is the charge transfer resistance of the circuit for each designated set of electrodes.

TABLE 3

		Impedance (Ohms)	
Storage Time (Day)	O.C.P. (Volts)	Rs	Rc
MnO2 versus Zn			
4	1.58	240	40000
11	1.48	350	1.40E+05
MnO2 versus Pt			
4	1.0748	200	35000
11	0.957	346	1.40E+05
Zn versus Pt			
4	-0.503	28	400
11	-0.533	25	100

Table 3 shows, for example, a drop in O.C.P. over time that is associated with the cathode layer for the exemplary micro battery. At the same time, the resistance in series and resistance of the charge transfer increases over time for the cathode. The resistance of charge transfer resistance for the zinc anode versus the auxiliary electrode decreases over time. Thus, it is evident that the loss in performance over time of the exemplary micro battery is primarily associated with the MnO_2 cathode.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, element components, and/or groups thereof.

The corresponding structures, materials, acts, and equivalents of all means or step plus function elements in the claims below are intended to include any structure, material, or act for performing the function in combination with other claimed elements as specifically claimed. The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the invention. The embodiment was chosen and described in order to best explain the principles of the invention and the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

The flow diagrams depicted herein are just one example. There may be many variations to this diagram or the steps (or operations) described therein without departing from the spirit of the invention. For instance, the steps may be performed in a differing order or steps may be added, deleted or modified. All of these variations are considered a part of the claimed invention.

The descriptions of the various embodiments of the present invention have been presented for purposes of illustration, but are not intended to be exhaustive or limited to the embodiments disclosed. Many modifications and

variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the described embodiments. The terminology used herein was chosen to best explain the principles of the embodiments, the practical application or technical improvement over technologies found in the marketplace, or to enable others of ordinary skill in the art to understand the embodiments disclosed herein.

What is claimed is:

1. A method of evaluating a micro battery, comprising providing a micro battery comprising:
a cathode layer;
an anode layer physically separated from the cathode layer;
an electrolyte layer in contact with the anode layer and the cathode layer; and
at least one auxiliary electrode in physical contact with the electrolyte layer and one of the cathode layer or the anode layer, the auxiliary electrode comprising at least one metal coating and at least one non-conductive film, wherein the at least one metal coating is physically separated from the cathode and the anode, and the non-conductive film comprises a polymeric material; forming a first electrical circuit between the auxiliary electrode and one of the cathode layer or the anode layer;
applying an external electrical potential to the first electrical circuit; and
measuring one or more of a cathode layer property and an anode layer property.
2. The method according to claim 1, further comprising:
forming a second electrical circuit between the cathode and the anode;
applying an external electrical potential to the second electrical circuit;
measuring a battery property; and
comparing the battery property to one or more of the anode layer property and the cathode layer property.
3. The method according to claim 2, wherein the battery property, the cathode layer property, and the anode layer property comprise a circuit resistance.

4. The method according to claim 2, wherein the battery property, the cathode layer property, and the anode layer property comprise a charge transfer resistance.

5. The method according to claim 2, wherein the battery property, the cathode layer property, and the anode layer property comprise an open circuit potential of the electrical circuit.

6. The method according to claim 1, wherein the at least one auxiliary electrode is ionically connected to the cathode layer and to the anode layer.

7. A method of evaluating a micro battery, comprising providing a micro battery comprising:

- a cathode layer;
 - an anode layer physically separated from the cathode layer;
 - an electrolyte layer in contact with the anode layer and the cathode layer; and
 - a first auxiliary electrode and a second auxiliary electrode, each of the first auxiliary electrode and the second auxiliary electrode in physical contact with the electrolyte layer and one of the cathode layer or the anode layer and each comprising at least one metal coating and at least one non-conductive film, wherein the at least one metal coating is physically separated from the cathode and the anode, and the non-conductive film comprises a polymeric material;
- forming a first electrical circuit between the first auxiliary electrode and the second auxiliary electrode;
applying an external electrical potential to the first electrical circuit; and
measuring a property of the electrolyte layer.

8. The method according to claim 7, further comprising:
forming a second electrical circuit between the cathode and the anode;
applying an external electrical potential to the second electrical circuit;
measuring a battery property; and
comparing the battery property to the electrolyte layer property.

* * * * *